

(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 898 643 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
21.03.2001 Bulletin 2001/12

(51) Int Cl.7: F01N 3/28, F01N 3/02,  
F01N 3/20, F01N 1/08,  
F01N 1/24

(21) Application number: 97922904.4

(86) International application number:  
PCT/DK97/00227

(22) Date of filing: 15.05.1997

(87) International publication number:  
WO 97/43528 (20.11.1997 Gazette 1997/50)

(54) SILENCER

SCHALLDÄMPFER

SILENCIEUX

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI NL PT  
SE

(30) Priority: 15.05.1996 DK 57996

(43) Date of publication of application:  
03.03.1999 Bulletin 1999/09

(60) Divisional application: 00116013.4 / 1 050 670

(73) Proprietor: SILENTOR NOTOX A/S  
2640 Hedehusene (DK)

(72) Inventors:  
• FREDERIKSEN, Svend  
DK-2100 Copenhagen OE (DK)  
• FREDERIKSEN, Lars  
DK-2820 Gentofte (DK)  
• SCHOUBYE, Peter, Carl, Sehested  
DK-2470 Hoersholm (DK)

(74) Representative:  
Plougmann, Vingtoft & Partners A/S  
Sankt Annæ Plads 11,  
P.O. Box 3007  
1021 Copenhagen K (DK)

(56) References cited:  
EP-A- 0 158 625 EP-A- 0 744 536  
DE-A- 3 039 742 US-A- 4 094 645  
US-A- 4 848 513

- PATENT ABSTRACTS OF JAPAN vol. 016, no. 282 (M-1269), 23 June 1992 & JP 04 072414 A (YAMAHA MOTOR CO LTD), 6 March 1992,
- PATENT ABSTRACTS OF JAPAN vol. 017, no. 700 (C-1145), 21 December 1993 & JP 05 237397 A (YAMAHA MOTOR CO LTD), 17 September 1993,

EP 0 898 643 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] The present invention relates to an apparatus for silencing and purification of exhaust gases, e.g. exhaust gases from internal combustion engines.

5 [0002] In modern vehicles, both silencers and purification devices, e.g. catalytic converters, are in many instances installed in engine exhaust systems with the aim of simultaneously reducing exhaust noise and noxious exhaust gas element emissions to acceptable levels. Under-vehicle space available for such equipment is often limited. In addition, exhaust system backpressure should not exceed certain limits, to prevent excessive detracting from fuel economy and engine performance. Thus, the combined requirements for effective noise suppression and purification represent geomet-  
10

[0003] Sometimes the space available for silencers and purification devices may also be limited in the case of stationary engines, e.g. gas engines for combined heat and power generation.

[0004] Various devices have been introduced to accommodate catalytic converters in silencer casings, instead of using separate units. In most cases such combinations have presupposed a simple series connection of silencing and  
15 catalytic elements. Such an arrangement can be designed without excessive space demands, when catalysers occupy only a small fraction of the volume needed for silencers. So far, when legal limits on noxious emissions have compromised with limits to investment costs and to the technology available, catalytic bodies in many cases have been rather small, typically occupying no more than 10-20% of the silencer volume.

[0005] However, ever more stringent demands on noxious emissions tend to call for bigger purification devices in  
20 addition to engine developments towards lower cylinder emissions, thus aggravating the space requirement conflict. A particularly difficult case is emerging in relation to diesel engine emissions. In the case of gasoline engine, 3-way catalysers are state of the art and provide an effective simultaneous reduction of hydrocarbons, carbon oxide, and nitric oxides. Diesel engines, in contrast, because of high contents of oxygen and particles in the exhaust gases may require a combination of an oxidizing catalytic body, a reducing catalytic body, and a particle trap for effective reduction  
25 of all noxious components.

[0006] Another problem is that although purification devices like catalytic converters may provide some reduction of high-frequent noise, primarily due to increased flow resistance in the narrow flow channels through the monolith, converters in themselves do not in general contribute significantly to the suppression of low-frequent noise. This is unfortunate, since low-frequent noise suppression in silencers calls for big acoustic chamber volumes to become effective.

30 [0007] JP 04072414 describes an apparatus for silencing and purification of exhaust gases, comprising a casing, an inlet and an outlet pipe, two compartments, a monolithic body, and a channel inside the casing for connecting the two compartments, wherein the inlet pipe penetrates the monolithic body. The purpose of the apparatus according to JP 04072414 is to increase heat conductivity so as to quickly attain a purifying temperature by providing an auxiliary catalyst to the inside of the exhaust pipe that has been connected to the exhaust port of an engine, and by forming the  
35 auxiliary catalyst out of an alumina layer and a catalytic metal.

[0008] EP 0 744 536 A2 describes an apparatus comprising a catalyst with an adjacent baffle, the baffle causing exhaust gas from a pipe penetrating the catalyst to flow in a radial direction immediately downstream of the pipe and from there through longitudinal channels or porosities of the catalyst. When flowing through the porosities, the flow  
40 direction of the gas is opposite to the flow direction in the pipe. The inflow to the monolithic body is distributed through at least two mutually radially displaced apertures which are adapted to provide pressure recovery in the gas flow passing therethrough.

[0009] US patent 5,426,269 discloses a silencer with a built-in catalytic converter.

[0010] The present invention provides a combined silencer-purification apparatus. The apparatus may be designed in a number of embodiments derived from a common principle, all very efficient, both as silencers and as purification  
45 devices. The invention allows for rather voluminous catalysers and particulate traps to be fitted into silencer casings of a limited size, along with efficient low- and high-frequent noise suppression.

[0011] Accordingly, the invention relates to an apparatus for silencing and purification of exhaust gases comprising: an air-tight casing connected to an exhaust inlet pipe and to an exhaust outlet pipe and containing: at least two acoustic  
50 compartments, and one or more monolithic bodies through which exhaust gases, in operation of the apparatus, flow in a flow direction in longitudinal channels or porosities, and one or more pipes or channels, at least one pipe or channel penetrating one or more of the monolithic bodies and guiding exhaust gases in a flow direction which is opposite to the flow direction in the channels or porosities of the monolithic body, and at least one of the pipes or channels connecting the at least two compartments.

55 [0012] In the present context, the term "acoustic compartment" designates a continuous space or volume of a cross sectional area throughflowable by gas, the space being limited at a gas inlet part thereof by an inlet of a smaller cross sectional area and at a gas outlet part thereof by an outlet of smaller cross sectional area. The cross sectional area of the space is at least 1.5 times the cross sectional area of the inlet or outlet, normally at least 2 times and in most cases at least 3 times, such as at least 4 times or 5 times or often preferably at least 6, 7, 8 or 9 times the cross sectional

area of the inlet or outlet; typical values are 10-20 times the cross sectional area of the inlet or outlet. In the calculation of the throughflowable cross sectional area of the continuous space, any non-throughflowable obstruction is deducted. Thus, for example, when a major part of the cross sectional area of the continuous space is occupied a wall-flow particle filter with wall cross sections occupying up to, e.g., 50% of the cross section of the filter, that 50% of the cross section is deducted.

[0013] Typical values of the diameters of the inlet and outlet pipes are 50-230 mm (2-11 inches) for vehicle applications of an apparatus according to the invention and 300 mm - 1000 mm for ship applications. The casing typically has an overall length of 1-3 m for vehicle applications and up to 15 m for ship applications. However, smaller or larger devices may be preferred for some applications.

[0014] In the present context, the term "monolithic body" or "monolith" designates, as is customary in the art, a body of an overall or macroscopic monolithic appearance, often a cylindrical body, which has a structure allowing an overall axial gas flow through the body. The term "monolithic" does not rule out that the body could be made from a plurality of segments joined or arranged together. The structure allowing an overall axial gas flow through the body will depend on the construction and material of the monolith; two typical relevant monolith types are:

- a monolith made from a corrugated foil wound up cylindrically so that the corrugations provide axial gas flow channels, and
- a monolith made of a particulate ceramic material, e.g., silicon carbide particles sintered together, and having a honeycomb structure comprising axial channels constituted by a plurality of coextending throughgoing passages separated by common passage walls, the passages being closed at the inlet and the outlet end, alternately. Thus, in a filter body of this kind, the gas travels into the passages open at the inlet side, through the walls into the passages open at the outlet side and then out of the filter body.

[0015] The invention is based on findings that one or more flow reversals can be accommodated internally in the silencer /monolith combination in such a way that internal connecting pipes or channels can be designed to a substantial length, compared to the total length of the casing containing all sound suppression and emission reducing elements; the length of the internal connecting pipes or channels will normally be at least the length of a monolith or almost the length of a monolith and can be up to, e.g., almost the length of the casing or even longer. The invention makes it possible to provide designs with rather narrow flow areas of internal pipes or channels, such as flow areas of about the same size as the inlet and outlet pipes or even smaller, without causing excessive pressure drops, typical pressure drops being of the magnitude of 1-2 times the dynamic pressure in the inlet pipe when the monolith or monoliths is/ are of the through-flow catalyst monolith type. In accordance with this last objective, it is preferable to use smooth surfaces of these internal pipes or channels, preferably without any perforations in their side walls.

[0016] The acoustic attractiveness of the above mentioned findings and objectives can be explained by the theory of silencers in which sound is reflected at changes in flow area between pipes and acoustic chambers. Such silencers act as low-pass filters, i.e. they are effective above a certain natural frequency. In the case of a single acoustic chamber of volume V, connected to a tailpipe of length L and cross-sectional area a, this natural frequency can be expressed as (c = velocity of sound):

$$f = \frac{c}{2\pi} \sqrt{\frac{a}{LV}} \quad (1)$$

[0017] In the case of two chambers of volumes V1 and V2, connected by a pipe of length L and of cross-sectional area a, the natural frequency can instead be expressed as:

$$f = \frac{c}{2\pi} \sqrt{\frac{a}{L} \left( \frac{1}{V1} + \frac{1}{V2} \right)} \quad (2)$$

[0018] Above a certain, sufficiently high frequency, silencer sound level attenuation increases with the number of chambers. For a given total silencer volume, however, and given lengths of internal pipes, an increased number of acoustic chambers raises the lower limiting frequencies of the low-pass filters, so that the number acoustic chambers will be limited. In many cases of vehicle silencers, no more than two chambers can realistically be fitted into a given silencer volume.

[0019] When applying eqs. (1) and (2) to an apparatus having one or more acoustic compartments containing a

monolithic body, the total void volume constituted by channels and open pores of the monolithic body should be included in the volumes V, V1 and V2, respectively.

[0020] Thus, big pipe lengths L and small cross-sectional areas a are necessary. An additional incentive to use small cross-sectional areas a is derived from the fact that the bigger the ratio:

$$r = A/a \quad (3)$$

between acoustic chamber flow area A and pipe cross-sectional flow area a is, the larger sound reflection is achieved at the changes in cross-sectional area between acoustic chambers and pipes.

[0021] The invention combines penetration of one or more monolithic bodies with one or more flow reversals inside the silencer, to make possible usage of comparatively long, narrow and thus acoustically favorable internal pipes or channels.

[0022] In most cases purification elements, such as e.g. catalytic monoliths, are made as full, cylindrical bodies in the prior art. When hollow bodies have been employed, it has been for varying reasons differing from the purpose of the present invention.

[0023] Thus, for example, German Offenlegungsschrift DE 3713964 A1 discloses a catalytic device in which one or more monolithic bodies are penetrated by an inlet pipe or by an outlet pipe connecting the casing with the external exhaust piping system of an engine. In this device the primary purpose is to achieve an optimally high operating temperature of the catalyser. A secondary purpose is to achieve an effectively long inlet pipe from the engine, even if the device is placed rather close to the engine, to optimise flow-dynamic conditions in the connecting inlet pipe, i.e. to promote engine cylinder scavenging.

[0024] Flow reversals have been commonly used in silencers and to some extent also in combined silencer/catalyser arrangements, as e.g. described in US Patent 5,043,147. Here, however, catalyst bodies are not penetrated by reversed-flow pipes or channels.

[0025] Although arranging a penetrating pipe in a monolith according to the principles of present invention represents a deviation from most common practices, such a penetration is not very difficult to achieve in manufacture. As an example, in monolithic bodies manufactured from corrugated foils, penetrating acoustic flow pipes or channels can be accommodated as follows: A cylindrical hollow structure can be made by wrapping the foil onto a central pipe to create a spirally arranged pattern of longitudinal, parallel channels external to the central pipe. To protect the monolith from thermal expansion and from vibrations emanating from exhaust gas flow led centrally through the structure, when inserting the catalyser into a silencing unit, the central pipe can be made flexible, e.g. with corrugated walls, and can be arranged around a somewhat smaller rigid pipe guiding the exhaust flow. The separating, annular space can be filled with a flexible, heat-resistant material such as the material Interam® available from 3M, St. Paul, Minnesota, U.S.A. In case the penetrating exhaust pipe is arranged as an extension of the inlet pipe to the silencer, a flexible connection may be inserted between the two pipes, to provide additional protection to the monolith from vibrative mechanical excitation.

[0026] However, in the device according to the invention, the monolith or monoliths may be of many different kinds according to per se well-known technologies which may be used alternatively or in combination, as will be obvious to the engineer once he has understood the present invention.

[0027] Thus, the monolith may be of the throughflow or wall-flow type, the latter forcing the exhaust gases to take tortuous paths, to achieve a mechanical filtering effect in a particulate trap. The internal surfaces of the monolith may be covered by catalytical layers to promote various steps in purification conversion processes. The walls of the monolith may be ceramic, metallic or glass-fibrous. The monolith can be of a foam or a wire mesh structure. The monolith can be arranged as an assembly of segments, e.g. separated by division planes that are radial or perpendicular to the general flow direction. The latter arrangement will typically be adopted when different types of purification elements are arranged adjacent to each other in series flow configurations.

[0028] When selective catalytic reduction of NOx is accommodated in a silencer/purification device according to the invention, flow reversals and other abrupt flow deflections can be utilised for improving decomposition of elements, such as urea, injected into the exhaust gas flow upstream of the catalytic body. This can be done by coating internal surfaces preferably adjacent to flow reversals with a catalytic layer which is active in decomposing droplets impinging on the surfaces. As will be explained, this facility is a further element of the invention which is particularly attractive in the case of narrow under-vehicle space limitations imposed on diesel engine exhaust systems of e.g. trucks and buses.

[0029] The above objects and features of the invention will become more apparent from the following detailed description by reference to the drawings, in which

Fig. 1 shows a first embodiment of the invention,

Fig. 2 shows a cross-section A-A of the embodiment of Fig. 1,

Fig. 3 is an alternative to the cross-sectional view A-A of Fig. 2, indicating a slightly modified version of the first embodiment of the invention,

Fig. 4 shows a third embodiment of the invention,

Fig. 5 shows a fourth embodiment of the invention,

5 Fig. 6 shows a fifth embodiment of the invention,

Fig. 7 shows a cross-section A-A of the embodiment of Fig. 6,

Fig. 8 shows a sixth embodiment of the invention,

Fig. 9 shows a seventh embodiment of the invention,

Fig. 10 shows a eighth embodiment of the invention,

10 Fig. 11 shows a ninth embodiment of the invention.

[0030] In most of these examples, the penetrating pipe is shown to be located centrally to a monolith. Most of the embodiments are shown to be of circular-symmetric design, but obviously other types of cross-sections, such as elliptical, conical configurations etc. are possible and may be suitable in various circumstances.

15 [0031] In Fig. 1, a central pipe 6 is shown to penetrate a monolith 5. A further, annular channel 7 is shown to be arranged around the circular periphery of the monolith. The pipe 6 is connected directly to the inlet pipe 2 which leads unsilenced and uncleaned exhaust gases into the silencer/purification unit at one end of the casing 1. An outlet pipe 3 leads silenced and cleaned gases from the other end of the casing. The casing is made up of a cylindrical shell 10 and of end caps 11 and 12.

20 [0032] An internal baffle 13 divides the space within the casing into 2 aggregate acoustic compartments, 4i and 4ii. These compartments are each made up of various cavities: The left compartment, 4i, is made up of the two cavities, 22, 23 immediately upstream and downstream, respectively, of the monolith, and of the aggregate cavity made up of the space within the multitude of longitudinal channels within the monolith. The compartment to the right, 4ii, is made of a central cavity 24 and of cavities within sound absorptive material (mineral or glass wool) 28, arranged protected  
25 from the exhaust gas flow by perforated baffles 29.

[0033] The logic behind linking the mentioned six cavities together into two groups under common reference numerals: 4i and 4ii, respectively, is that this makes the acoustic function of connection channel 7 more clear. It should be pointed out that, provided the sound absorptive material is made appropriately, that is neither too mechanically weak or too acoustically massive, the gas volumes within the absorptive material will act as effective extensions to volume 24, thus lowering the natural frequency according to equation (2). Monolith 5 will cause some acoustic subdivision of compartment 4i, the more so the smaller is the porosity of the monolith.

[0034] Two types of diffusers 8 and 9 have been fitted onto the penetrating pipe 6 and onto the annular channel 7, respectively. These diffusers serve several functions: First, the flow areas in both diffusers widen in the flow direction, whereby dynamic pressure is recovered which contributes to a comparatively low pressure drop across the silencer/  
35 purification unit. Second, in accordance with European patent no. EP 0 683 849, the narrow, predominantly axial outflows from the diffusers have been positioned at the pressure nodes for transverse resonant gas vibrations in the cylindrical cavities into which the flows are guided by the diffusers, thus suppressing such resonances. Finally, the diffuser 8 serves to reverse the general flow direction and to distribute the flow to the inlet of the monolith more evenly, thereby increasing the efficiency of the conversion and preventing uneven loading of the various, parallel channels of the monolith. The left diffuser, 8, is made up of two dome-shaped baffles 17 and 18, whereas the annular diffuser 9 is  
40 made up of two conical pipes 19 and 20 which diverge somewhat to create a flow area increase, and which both are directed inwardly to guide the flow from the annular channel 7 towards the centrally positioned outlet pipe 3.

[0035] The annular channel 7 is made up of part of the outer, cylindrical shell 10 and of an inner, likewise cylindrical shell 14. This inner shell also serves the purpose of contributing to fix the monolith 5 which is inserted into the shell  
45 14, with an interposed, flexible and heat-resistant layer 15. The monolith is protected from thermal expansion and from vibrations from the penetrating pipe 6 by a further, flexible and heat-resistant layer 16.

[0036] Fig. 2 shows a cross-section A-A of the embodiment of Fig. 1.

[0037] Exhaust gases entering the silencer/converter through the inlet pipe 2 are led further through the catalytic monolith 5 by the centrally positioned pipe 6 to the diffuser 8 which recovers part of the rather high dynamic pressure  
50 in the pipe 6. In the diffuser, the general flow direction is reversed, and the exhaust gas flow is led to the cavity 22 through the diffuser outlet 21. Here, an abrupt increase of flow area takes place which contributes to sound reflection and thus to the overall sound attenuation in the silencer/purification unit.

[0038] Outlet 21 is positioned at some distance from the face of the monolith and at an intermediate radius between the inner and outer radii of the monolith. Thus, exhaust gases are distributed rather evenly to the multitude of longitudinal channels of the monolith. In these channels the flow direction is opposite to the direction of flow in the penetrating pipe 6. From the outlet face of the monolith the exhaust gases enter the cavity 23, where the general flow direction is reversed once again, and the exhaust gases are led radially outwardly towards the inner surface of the cylindrical shell  
55 10.

[0039] The exhaust flow leaves the cavity 23 by entering the inlet 25 to the annular channel 7. Here, an abrupt decrease of flow area takes place which contributes to sound reflection. At the inlet 25 the inner shell 14 has been slightly deformed (or alternatively has been extended by a small ring) to provide a small curvature which prevents flow separation and thus reduces entrance pressure losses to a minimum. Thereby the flow area of the channel 7 can be kept as small as possible which is favorable to sound attenuation. The annular channel extends to the annular diffuser 9, in which a second pressure recovery takes place, this time a partial recovery of the rather high dynamic pressure in the annular channel 7.

[0040] At the diffuser outlet 26 the exhaust gases are directed into the cavity 24, from which they enter the outlet pipe 3 at the aperture 27 of the end cap 12. At the diffuser outlet 26 an abrupt increase in flow area takes place which contributes to sound reflection. At the aperture a curvature has been provided for, to prevent flow separation and thereby keep entrance pressure losses at a minimum. In spite of this curvature, the flow area transition from the cavity 24 to the outlet pipe 3 acoustically acts as an abrupt decrease of flow area which contributes to sound reflection. Additional sound attenuation, in particular at higher frequencies, is provided for by the sound absorptive material 28 which by means of perforated baffles 29 is held positioned in the casing and is protected from fluid dynamic forces.

[0041] From inlet pipe 2 to diffuser outlet 21 exhaust gases are led centrally inside the casing 1. Thereby the loss of exhaust gas temperature from the inlet pipe to the monolith will be only minimal.

When the monolith is a catalyser, this helps keep a high degree of catalytic conversion, in particular in load situations when the gas temperature is generally low. Of course, further protection from heat losses can be provided for by adding heat insulation around the casing 1. Such insulation can also be adopted with the aim of reducing sound break-out through the shell 1 and through the end caps 11 and 12.

[0042] It can be seen that the double flow reversal which takes place in the silencer/purification unit, has provided a basis for designing the unit with a rather long and narrow channel 7 which connects two acoustic compartments, 4i and 4ii. Even though the monolith occupies as much as around 1/3 of the total unit volume, the connecting channel 7 is as long as 2/3 of the total length of the unit. This means that the 2 chambers and their connecting channel together constitute a very low natural frequency  $f$  (according to the previously given equation (2)). Thus, it has been made possible to accommodate, within a limited total volume of the silencer/ purification unit, two acoustic compartments and four sound-reflecting flow area transitions, 21, 25, 26, and 27. By virtue of the rather long channel 7, all the three first-mentioned flow area transitions will be acoustically effective from a rather low frequency, somewhat above the natural frequency  $f$ . Provided the length of the outlet pipe, together with its possible extension to the outlet to the atmosphere, is not too short, also the last-mentioned flow area transition, 27, will be acoustically active from a rather low frequency.

[0043] The flow area of the connecting channel 7 is kept rather narrow which increases the degree of sound reflection according to equation (3). In spite of the narrow channel, and even though 2 flow reversals take place inside the device, the overall pressure drop across the unit can be kept comparatively low.

[0044] In the embodiment of Fig. 4, a curvature 39, preventing flow separation, has been applied to the inner contour of the annular inlet to connecting channel 7, as well as to the circular inlet contour of the extension of the outlet pipe 3 into the apparatus in order to reduce the overall pressure drop across the unit. Curvatures of similar function can be seen in Figs. 3, 9, 10 and 11.

[0045] In Fig. 8, a curvature 39 has been applied to the outlet of the extension of the inlet pipe 2 into the apparatus. A similar curvature can be seen in Fig. 9. In other cases, e.g., in Fig. 4, a sharp-edged outlet has been used instead. In general, curvatures are preferred on outlets which are positioned close to a wall on which the flow impinges, since in such cases the curvature can have a substantial effect in eliminating or minimising flow separation. When flows extend from a pipe or channel without impingement on an opposite wall, a curvature applied to an outlet contour may be even harmful, due to flow instability characterised in transverse flow jet pulsation. The question when to apply, and when not to apply curvatures 39, can be settled by experiment or by computer simulation, using commercially available computer codes.

[0046] In Fig. 3, the annular channel 7 of Fig. 2 has been divided into 4 triangular channels 7i, ii, iii, and iv which divide the flow into 4 equal, parallel flows. The cylindrical outer shell 10 of Fig. 2 has been replaced by a shell of squared profile. Heat-insulating material, 28 (e.g. mineral wool of the type also used as sound-absorptive material), has been inserted into the spacing between the outer and inner shells, as well as between the outer shell and the four triangular channels.

[0047] Shells with plane surfaces tend to be less effective in insulating against sound break-out, compared to curved shells. Thus, it can be advisable to extend the inner, cylindrical shell, 14, to the far left end of the unit, i.e. from the entrances 25 to the parallel channels and back to the inside of the left end cap 11, combined with a provision for entrance slots in the extended part of the inner shell, to allow for inflows to the four channels 7i - iv from the farleft cavity 23.

[0048] The alternative cross-sectional geometry of Fig. 3 in some instances will provide functional advantages over the first embodiment of the invention at the sacrifice of a slightly more complicated design. The squared outer shell

may be particularly appropriate when the available space for the device is in itself squared, as is sometimes the case. In such instances, the squared shell form represents a maximum utilisation of the cross-section for the various functions to be fulfilled by the unit. It can be seen that for a given height and width of the unit, a bigger diameter of the catalytic monolith can be selected in Fig. 3, compared to Fig. 2. This helps keep down the pressure drop across the monolith.

Another feature of the alternative embodiment is that the surface area/cross-sectional area is smaller in the case of the 4 parallel channels, compared to an annular channel. For a given pressure drop across the connecting channel(s) 7, this allows for a smaller total cross-sectional area of the 4 channels which is favorable in terms of the degree of sound reflection according to equation (3).

[0049] In a third embodiment of the invention, according to Fig. 4, two monoliths 5i and 5ii have been connected in series. For instance, monolith 5i could be a reducing catalytic converter and monolith 5ii an oxidising converter. In Fig. 4 the flow arrangement differs from that of the first embodiment shown in Fig. 1 in that the monolith penetrating pipe has been connected to the outlet pipe 3 instead of to the inlet pipe 2. This arrangement can be useful, e.g. when the distance between the end cap 12 and the far end of the outlet pipe is rather small. In such a case the length of the pipe 6 adds substantially to the acoustically effective tail length L determining the natural frequency according to equation (1).

[0050] Fig. 5 shows a fourth embodiment according to the invention. Here, the monolith penetrating pipe 6, together with a diffuser 30 constitutes the connecting pipe between two acoustic compartments 4i and 4ii. This usage of a central, penetrating pipe as the interconnecting pipe is in itself very favorable in terms of pressure loss vs. natural frequency f according to eq. (2), as well as cross-sectional ratio r according to eq. (3). The reason is that a simple circular cross-section represents the lowest possible surface area/cross-sectional area ratio. Thus, for a given pressure drop across the connecting pipe, the flow area then becomes a minimum.

[0051] In Fig. 5, the cavities 22 and 23 are rather small, so that the major part of the acoustically effective volume of the compartment 4i is made up of the aggregate volume of the porosity of the monolith 5. Thus, Fig. 5 represents a particularly compact embodiment of the invention.

[0052] Figs. 6 and 7 show a fifth embodiment of the invention, utilising the principle of surface area/cross-sectional area minimisation of pipes/channels to the most. Here, an annular channel 6i, penetrating a monolith 5 has been arranged around a central pipe 6ii of circular cross-section. The outer, annular channel 6i constitutes a continuation of the inlet pipe 2, and the central pipe 6ii connects 2 internal acoustic compartments 4i and 4ii. A special flow element 31 serves as a low friction-loss guide for the two exhaust gas flows, i.e. guiding flow from the inlet pipe 2 to the annular channel 6i, and the reversing flow leaving the left and outlet face of the monolith 5 to the central pipe 6ii. In the flow element 31 the two flows cross each other. The flow to the central pipe is guided radially inwardly through a number of radial slots 32i - iv. The inlet flow to the annular space is guided past these slots in 4 passages 33i - iv and is simultaneously being forced slightly outwardly by the central, conical and hollow body 34.

[0053] Fig. 8 shows a sixth embodiment of the invention, in which 2 monoliths have been arranged inside a particularly long, annular connecting channel 7. Penetrating pipe 6i has been connected to the inlet pipe 2, and penetrating pipe 6ii has been connected to the outlet pipe 3.

[0054] Fig. 9 shows a seventh embodiment of the invention, in which an annular channel 6 has been arranged between 2 monoliths and thus provides a penetration through the entire monolith assembly.

[0055] Fig. 10 shows an eighth embodiment of the invention, in which a monolith 5ii has been arranged inside another monolith 5i (as in Fig. 9), and in which a penetrating pipe 6 has been arranged centrally inside the inner monolith 5ii.

[0056] The monoliths shown in Figs. 1 - 10, and quite generally the monoliths of the apparatus of the present invention, may consist of up to three types of purification elements, placed one after the other, in the general flow direction of the exhaust gas, each monolith performing one of the following purification processes: (A) Selective Catalytic Reduction (SCR) by ammonia of NOx in the gas, (B) catalytic oxidation of hydrocarbons and CO in the gas, and (C) removal of soot particles in the gas by filtration in the gas through the porous walls of a monolithic block in which every second channel is plugged at opposite ends of the channels in the block. The order will typically be that process (A) comes first, while (C) may follow (B), or (B) may follow (C).

[0057] The ammonia required for process (A) is, usually, formed by catalytic decomposition of urea, or other nitrogen containing chemicals that are injected in the form of droplets of aqueous solution or a dry powder of the chemical that is sprayed into the gas stream upstream the monolith that catalyses process (A). The decomposition of the chemical into ammonia and other gaseous products requires a long residence time of the liquid or solid particles in the gas stream, if the decomposition must take place with the particles staying in the gas stream, because the rate of heat transfer through the gas film surrounding the particles is low. If, however, the particles are caused to impinge on a solid surface of a material that catalyses the decomposition of the chemical, the rate of decomposition would be increased, firstly because the rate of heat transfer between the gas stream and a stagnant surface is much higher, and secondly due to the catalytic effect of the surface. When, furthermore, the catalytic surface is porous and particles are liquid, or they melt on the surface, the rate of decomposition will be further increased.

[0058] In the present invention it has been found that particles in the gas stream preferably impinge on surfaces of



the gas conduit at which the gas stream is deflected which may e.g. be wall 13 in Fig. 1 or internal baffle 13 in Fig. 3. Fig. 11 shows a ninth embodiment of the invention, in which catalytic layers 35 and 36 have been added to two walls on which particles may impinge, viz. part of internal baffle 13 and a flow element 37. The layers are typically porous and have a thickness between 0.1 and 1 mm.

5 [0059] The catalytic material is typically oxides of Al, Si, V, Ti, Zr or Fe, or mixtures hereof.

[0060] The amount of reducing agent injected is preferably equivalent to the total amount of NO<sub>x</sub> in the exhaust gas. Hence, with urea as the agent, one mole of urea is injected per two moles of NO<sub>x</sub>.

10 [0061] In preferred embodiments of this aspect of the invention, nitrogen-containing liquids such as aqueous solutions of urea or ammonia are sprayed into the gas stream by means of a two-phase nozzle using pressurized air at, e.g., 2-3 bar with the nozzle placed in the middle of the gas stream. Full cone nozzle types with spray angles in the range 20-45° are preferred. Such nozzles are commercially available. Suitable nozzles may be found in the catalogue "Die ganze Welt der Düsentechnik" p. 1.16 through 1.21, edition 921, from the company Lechler in Germany. With urea of high concentrations of about 50%, the nozzle type No. 158 for viscous liquids is suitable. A minimum flow of air through the nozzle safeguards against heating the nozzle above 120°. Higher temperatures of the nozzle could concentrate or decompose the urea in the nozzle thereby plugging the nozzle.

15 [0062] A solid powder can be injected by passing it through a funnel placed above and close to the exhaust gas conduit, the tip of the funnel extending into the gas conduit and the powder being blown into the gas stream by pressurized air injected at the tip of the funnel in analogy to known principles for unloading fine powders from silos.

20 [0063] When the process step (A) comes before the process steps (B) and (C), the nozzle for injection of the reducing agent is preferably placed in the inlet pipe 2, or in a duct upstream of the inlet pipe 2, in Fig. 2, and in a similar position at the inlet or upstream of the inlet to the silencer in Figs. 4, 5, 6, 3, 9, 10 and 11.

[0064] When the process step (A) comes after one of the other process steps, the nozzle is preferably placed in the gas stream downstream of the preceding process step. Figs. 8, 9 and 10 show embodiments of the invention in which process step (A) could be performed in the second of the two separate catalyst steps; here, the reducing agent could be injected in 2-4 nozzles placed at the positions 38 close to the outlet of the preceding, annular catalyst block.

25 [0065] A layer of porous catalytic material can be coated on steel surfaces according to methods known from the manufacture of Catalyzed Hardware. The principles are as follows: The steel surface is sandblown, painted with a high temperature paint, preferably on basis of Ti or Zr compounds, and heated to 300-500°C before applying an alumina-based wash coat of the same type as used for wash-coating catalytic monoliths.

30 [0066] Alternatively, the steel surface could be plasma-sprayed with oxide of, e.g., V, Al, Fe, Zr or Si forming a layer that could be used itself as catalyzed layer, or it could be used as primer for further wash-coating according to known methods.

## 35 Claims

Claims for the following Contracting States : AT, BE, CH, DE, DK, ES, FR, GB, IT, LI, NL, SE

40 1. An apparatus for silencing and purification of exhaust gases, comprising: an air-tight casing (1) connected to an exhaust inlet pipe (2) and to an exhaust outlet pipe (3) and containing: at least two acoustic compartments (4i, 4ii), and one or more monolithic bodies (5) through which exhaust gases flow in a flow direction in longitudinal channels or porosities, and one or more pipes or channels (6, 7), at least one pipe or channel (6) penetrating one or more of the monolithic bodies (5) and guiding exhaust gases in a flow direction which is opposite to the flow direction in the channels or porosities of the monolithic body, at least one of the pipes or channels (6, 7) connecting the at least two compartments (4i, 4ii), characterised in that

45 said at least one pipe or channel (6, 7) connecting the at least two acoustic compartments (4i, 4ii) extends throughout substantially the entire length of said monolithic body (5), and that said at least one pipe or channel (6, 7) penetrates the monolithic body (5) or extends along its outer surface, with the proviso that the apparatus wherein

- said at least one pipe or channel (6, 7) connects two acoustic compartments (4i, 4ii) and extends along the outer surface of the monolithic body (5), and wherein
- the apparatus comprises one and only one monolithic body (5) which is a catalyser, with an adjacent baffle, and which is penetrated by a pipe connected to said inlet pipe (2) or said outlet pipe (3), and wherein
- said baffle causes full or partial flow stagnation and causes exhaust gas flowing axially from a pipe or channel (6, 7) to flow in a radial direction immediately downstream of the pipe or channel and from there through the longitudinal channels or porosities of the monolithic body in a flow direction opposite to the flow direction in



- the pipe or channel, and wherein
- the inflow to the monolithic body is distributed through at least two mutually radially displaced apertures which are adapted to provide pressure recovery in the gas flow passing therethrough, and wherein
  - sound absorptive material is arranged in two separate cavities in the casing, each of said cavities being in acoustical communication with gas flowing within the casing, and each of said cavities being separated from one of the acoustic compartments (4i, 4ii) by a perforated pipe or plate
- shall be excluded.
2. An apparatus according to claim 1 wherein the general flow direction is reversed substantially immediately upstream of a penetrated monolithic body (5) and substantially immediately downstream of either the same monolithic body or of another penetrated monolithic body.
  3. An apparatus according to claim 1 wherein a penetrating pipe or channel (6) is positioned centrally in the cross-section of one or more of the monolithic bodies (5).
  4. An apparatus according to claim 1 wherein a penetrating channel (6) has an annular cross-section.
  5. An apparatus according to claim 3 and 4 wherein the centrally positioned pipe or channel (6ii) is immediately surrounded by the annular channel (6i).
  6. An apparatus according to claim 1 wherein a monolithic body (5) is cylindrical, and is surrounded by a channel (7) with an annular cross-section.
  7. An apparatus according to claim 1 wherein two or more pipes or channels (7i, ii etc.) guide parallel exhaust flows downstream of a divergence from a common pipe or cavity and upstream of a merge into another common pipe or cavity within the casing (1).
  8. An apparatus according to claim 1 wherein one or more of the monolith penetrating pipes or channels (6) communicate with the inlet pipe (2), either directly, or via one or more further internal pipes or channels (7).
  9. An apparatus according to claim 1 wherein one or more of the monolith penetrating pipes or channels (6) communicate with the outlet pipe (3), either directly, or via one or more further internal pipes or channels (7).
  10. An apparatus according to claim 1 wherein a major part of one or more of the acoustic compartments (4) is constituted by the space within the multitude of longitudinal channels or porosities within a monolithic body (5).
  11. An apparatus according to claim 1 wherein curvatures (39), preventing flow separation, are applied to at least part of the contour of the outlet and/or inlet of a pipe or channel of the apparatus, said pipe or channel being the inlet pipe (2) or its extension into the apparatus and/or the outlet pipe (3) or its extension into the apparatus and/or a pipe or channel (6,7) connecting two compartments (4i,4ii).
  12. An apparatus according to claim 11 wherein said curvature (39) is applied to an outlet of a pipe or channel adjacent to a domain of impingement of gas flow on an end cap (11, 12) on an internal baffle (13), or on a wall (18,37), thereby assisting smooth flow reversal.
  13. An apparatus according to claim 1 wherein a diffuser (8, 9, 30) is fitted to the outlet end of one or more of the internal pipes or channels (6, 7).
  14. An apparatus according to any of the preceding claims wherein one or more of the monolithic bodies is/are provided with a catalytic active surface on the channels, which catalytic active surface is active in the decomposition of impurities in the exhaust gases.
  15. An apparatus according to any of the preceding claims wherein means are provided for injecting solid particles active for catalytic reduction of NOx, or a spray of a liquid containing components, such as an aqueous solution of urea and/or ammonia, active for catalytic reduction of NOx, into exhaust gases upstream of the apparatus, into the inlet pipe (2), or into an internal pipe or channel (6, 7) upstream of a monolith (5).

16. An apparatus according to any of the preceding claims wherein one or more layers (35, 36) are applied to an end cap (11, 12), to an internal baffle (13), or to a wall (18, 37) of a flow element preferably positioned upstream of the first monolith (5) throughflowed by exhaust gases, said layer containing a material that has a catalytic activity for decomposition into gas phase ammonia of particles or droplets of urea or other nitrogen containing components, said internal baffle, said end cap, or said flow element being arranged so that said particles and/or droplets impinge thereon.
17. An apparatus according to any of the preceding claims wherein said end caps, said internal baffle, and/or said flow element is/are arranged so that the exhaust gas flow direction reverses approximately 180 degrees adjacent to a domain wherein the particles and/or droplets impinge thereon.
18. An apparatus according to any of the preceding claims wherein the one or more layers (35, 36) are porous and comprise oxides of Al, Si, V, Ti, Zr or Fe, or mixtures thereof.

Claims for the following Contracting States : FI, GR, IE, PT

1. An apparatus for silencing and purification of exhaust gases, comprising: an air-tight casing (1) connected to an exhaust inlet pipe (2) and to an exhaust outlet pipe (3) and containing: at least two acoustic compartments (4i, 4ii), and one or more monolithic bodies (5) through which exhaust gases flow in a flow direction in longitudinal channels or porosities, and one or more pipes or channels (6, 7), at least one pipe or channel (6) penetrating one or more of the monolithic bodies (5) and guiding exhaust gases in a flow direction which is opposite to the flow direction in the channels or porosities of the monolithic body, at least one of the pipes or channels (6, 7) connecting the at least two compartments (4i, 4ii), characterised in that said at least one pipe or channel connecting the at least two acoustic compartments extends throughout substantially the entire length of said monolithic body, and that said at least one pipe or channel penetrates the monolithic body or extends along its outer surface.
2. An apparatus according to claim 1 wherein the general flow direction is reversed substantially immediately upstream of a penetrated monolithic body (5) and substantially immediately downstream of either the same monolithic body or of another penetrated monolithic body.
3. An apparatus according to claim 1 wherein a penetrating pipe or channel (6) is positioned centrally in the cross-section of one or more of the monolithic bodies (5).
4. An apparatus according to claim 1 wherein a penetrating channel (6) has an annular cross-section.
5. An apparatus according to claim 3 and 4 wherein the centrally positioned pipe or channel (6ii) is immediately surrounded by the annular channel (6i).
6. An apparatus according to claim 1 wherein a monolithic body (5) is cylindrical, and is surrounded by a channel (7) with an annular cross-section.
7. An apparatus according to claim 1 wherein two or more pipes or channels (7i, ii etc.) guide parallel exhaust flows downstream of a divergence from a common pipe or cavity and upstream of a merge into another common pipe or cavity within the casing (1).
8. An apparatus according to claim 1 wherein one or more of the monolith penetrating pipes or channels (6) communicate with the inlet pipe (2), either directly, or via one or more further internal pipes or channels (7).
9. An apparatus according to claim 1 wherein one or more of the monolith penetrating pipes or channels (6) communicate with the outlet pipe (3), either directly, or via one or more further internal pipes or channels (7).
10. An apparatus according to claim 1 wherein a major part of one or more of the acoustic compartments (4) is constituted by the space within the multitude of longitudinal channels or porosities within a monolithic body (5).
11. An apparatus according to claim 1 wherein curvatures (39), preventing flow separation, are applied to at least part of the contour of the outlet and/or inlet of a pipe or channel of the apparatus, said pipe or channel being the inlet

pipe (2) or its extension into the apparatus and/or the outlet pipe (3) or its extension into the apparatus and/or a pipe or channel (6,7) connecting two compartments (4i,4ii).

12. An apparatus according to claim 11 wherein said curvature (39) is applied to an outlet of a pipe or channel adjacent to a domain of impingement of gas flow on an end cap (11, 12) on an internal baffle (13), or on a wall (18,37), thereby assisting smooth flow reversal.
13. An apparatus according to claim 1 wherein a diffuser (8, 9, 30) is fitted to the outlet end of one or more of the internal pipes or channels (6, 7).
14. An apparatus according to any of the preceding claims wherein one or more of the monolithic bodies is/are provided with a catalytic active surface on the channels, which catalytic active surface is active in the decomposition of impurities in the exhaust gases.
15. An apparatus according to any of the preceding claims wherein means are provided for injecting solid particles active for catalytic reduction of NOx, or a spray of a liquid containing components, such as an aqueous solution of urea and/or ammonia, active for catalytic reduction of NOx, into exhaust gases upstream of the apparatus, into the inlet pipe (2), or into an internal pipe or channel (6, 7) upstream of a monolith (5).
16. An apparatus according to any of the preceding claims wherein one or more layers (35, 36) are applied to an end cap (11, 12), to an internal baffle (13), or to a wall (18, 37) of a flow element preferably positioned upstream of the first monolith (5) throughflowed by exhaust gases, said layer containing a material that has a catalytic activity for decomposition into gas phase ammonia of particles or droplets of urea or other nitrogen containing components, said internal baffle, said end cap, or said flow element being arranged so that said particles and/or droplets impinge thereon.
17. An apparatus according to any of the preceding claims wherein said end caps, said internal baffle, and/or said flow element is/are arranged so that the exhaust gas flow direction reverses approximately 180 degrees adjacent to a domain wherein the particles and/or droplets impinge thereon.
18. An apparatus according to any of the preceding claims wherein the one or more layers (35, 36) are porous and comprise oxides of Al, Si, V, Ti, Zr or Fe, or mixtures thereof.

### Patentansprüche

Patentansprüche für folgende Vertragsstaaten : AT, BE, CH, DE, DK, ES, FR, GB, IT, LI, NL, SE

1. Vorrichtung Schalldämpfen und Reinigen von Abgasen, umfassend: ein luftdichtes Gehäuse (1), das mit einem Abgas-Einlaßrohr (2) und einem Abgas-Auslaßrohr (3) verbunden ist und folgendes enthält: wenigstens zwei akustische Abteile (4i, 4ii) sowie einen oder mehrere monolithische Körper (5), durch welche die Abgase in einer Strömungsrichtung in längsverlaufenden Kanälen oder Porositäten strömt, und ein oder mehrere Rohre oder Kanäle (6, 7), wobei mindestens ein Rohr oder Kanal (6) den einen oder mehrere der monolithischen Körper (5) penetriert und Abgase in einer Strömungsrichtung führt, die entgegengesetzt zu der Strömungsrichtung in den Kanälen oder Porositäten des monolithischen Körpers ist, wobei mindestens eines bzw. einer der Rohre oder Kanäle (6, 7) die mindestens zwei Abteile (4i, 4ii) verbindet, dadurch gekennzeichnet, daß das bzw. der wenigstens eine Rohr oder Kanal (6, 7), das bzw. der die wenigstens zwei akustischen Abteile (4i, 4ii) verbindet, sich über die, im wesentlichen gesamte Länge des monolithischen Körpers (5) erstreckt, und daß das bzw. der wenigstens eine Rohr oder Kanal (6, 7) den monolithischen Körper (5) penetriert oder sich längs dessen Außenoberfläche erstreckt, mit der Maßgabe, daß die Vorrichtung ausgeschlossen sein soll, bei der
  - das oder der wenigstens eine Rohr oder Kanal (5, 6) zwei akustische Abteile (4i, 4ii) verbindet und sich längs der Außenoberfläche des monolithischen Körpers (5) erstreckt, und wobei
  - die Vorrichtung einen und nur einen monolithischen Körper (5) aufweist, der ein Katalysator ist, mit einer benachbarten Prallplatte, und der von einem Rohr penetriert ist, das mit dem Einlaßrohr (2) oder dem Auslaßrohr (3) verbunden ist, und wobei
  - die Prallplatte eine vollständige oder teilweise Stagnierung der Strömung veranlaßt und das Abgas veranlaßt.

- das axial von einem Rohr oder Kanal (6, 7) her strömt, unmittelbar stromabwärts des Rohres oder Kanals in einer radialen Richtung zu strömen, und von dort aus durch die längs-verlaufenden Kanäle oder Porositäten des monolithischen Körpers in einer Strömungsrichtung entgegengesetzt zu der Strömungsrichtung im Rohr oder Kanal, und wobei
- 5 - die Anströmung in den monolithischen Körper hinein durch wenigstens zwei zueinander radial versetzte Öffnungen verteilt wird, die dazu eingerichtet sind, für die Wiederherstellung des Drucks in der Gasströmung zu sorgen, die hier hindurchtritt, und wobei
  - schallabsorbierendes Material in zwei gesonderten Hohlräumen im Gehäuse angeordnet ist, wobei jeder der Hohlräume in akustischer Kommunikation mit Gas steht, das innerhalb des Gehäuses strömt, und jeder der Hohlräume von einem der akustischen Abteile (4i, 4ii) durch ein perforiertes Rohr oder eine perforierte Platte getrennt ist.
2. Vorrichtung nach Anspruch 1, worin die allgemeine Strömungsrichtung im wesentlichen unmittelbar stromaufwärts eines penetrierten monolithischen Körpers (5) und im wesentlichen unmittelbar stromabwärts entweder desselben monolithischen Körpers oder eines anderen penetrierten monolithischen Körpers umgekehrt wird.
  3. Vorrichtung nach Anspruch 1, worin ein penetrierendes Rohr oder Kanal (6) mittig im Querschnitt eines oder mehrerer monolithischer Körper (5) angeordnet ist.
  4. Vorrichtung nach Anspruch 1, worin ein penetrierender Kanal (6) einen ringförmigen Querschnitt aufweist.
  5. Vorrichtung nach Anspruch 3 und 4, worin das bzw. der mittig angeordnete Rohr oder Kanal (6ii) unmittelbar vom ringförmigen Kanal (6i) umgeben ist.
  6. Vorrichtung nach Anspruch 1, worin ein monolithischer Körper (5) zylindrisch ist und von einem Kanal (7) mit ringförmigem Querschnitt umgeben ist.
  7. Vorrichtung nach Anspruch 1, worin zwei oder mehrere Rohre oder Kanäle (7i, ii usw.) parallele Abgasströme stromabwärts einer Divergenz von einem gemeinsamen Rohr oder Hohlraum und stromaufwärts eines Zusammenflusses in ein anderes gemeinsames Rohr oder einen anderen gemeinsamen Hohlraum innerhalb des Gehäuses (1) leiten.
  8. Vorrichtung nach Anspruch 1, worin ein oder mehrere der den Monolithen penetrierende Rohre oder Kanäle (6) mit dem Einlaßrohr (2) entweder unmittelbar oder über einen oder mehrere innere Rohre oder Kanäle (7) verbunden ist bzw. sind.
  9. Vorrichtung nach Anspruch 1, worin ein oder mehrere der den Monolithen penetrierende Rohre oder Kanäle (6) mit dem Auslaßrohr (3) entweder unmittelbar oder über einen oder mehrere innere Rohre oder Kanäle (7) verbunden ist bzw. sind.
  10. Vorrichtung nach Anspruch 1, worin ein Hauptteil eines oder mehrerer der akustischen Abteile (4) von dem Raum innerhalb der Vielzahl von längsverlaufenden Kanälen oder Porositäten innerhalb eines monolithischen Körpers (5) gebildet ist.
  11. Vorrichtung nach Anspruch 1, worin Rundungen (39), die die Strömungsaufftrennung verhindern, zumindest zu einem Teil der Kontur des Auslaß- und/oder Einlaßrohres oder -kanales der Vorrichtung angefügt sind, wobei das bzw. der genannte Rohr oder Kanal das Einlaßrohr (2) oder seine Verlängerung in die Vorrichtung hinein und/oder das Auslaßrohr (3) oder seine Verlängerung in die Vorrichtung hinein und/oder ein Rohr oder Kanal (6, 7) ist, das die beiden Abteile (4i, 4ii) verbindet.
  12. Vorrichtung nach Anspruch 11, worin die genannte Rundung (39) an einen Auslaß eines Rohres oder Kanales neben einem Auftreffbereich einer Gasströmung an einer Endkappe (11, 12), an einer inneren Prallwand (13) oder an einer Wand (13, 37) angefügt ist und hierdurch die sanfte Strömungsumkehr unterstützt.
  13. Vorrichtung nach Anspruch 1, worin ein Diffusor (8, 9, 30) an das Auslaßende eines oder mehrerer der inneren Rohre oder Kanäle (6, 7) passend angesetzt ist.
  14. Vorrichtung nach irgendeinem der vorangehenden Ansprüche, worin ein oder mehrere der monolithischen Körper

mit einer katalytisch aktiven Oberfläche an den Kanälen versehen ist bzw. sind, und dieses katalytisch aktive Oberfläche bei der Zersetzung von Verunreinigungen in den Abgasen aktiv ist.

- 5 15. Vorrichtung nach einem der vorangehenden Ansprüche, worin Mittel vorgesehen sind, um Feststoffpartikel, die bei der katalytischen Reduktion von NO<sub>x</sub> aktiv sind, oder einen Sprühnebel einer Flüssigkeit, die Komponenten enthält, wie etwa eine wässrige Lösung von Harnstoff und/oder Ammoniak, die für die katalytische Reduktion von NO<sub>x</sub> aktiv sind, in die Abgase stromaufwärts der Vorrichtung in das Einlaßrohr (2) oder in ein Innenrohr oder einen Innenkanal (6, 7) stromaufwärts eines Monolithen (5) zu injizieren.
- 10 16. Vorrichtung nach einem der vorangehenden Ansprüche, worin eine oder mehrere Schichten (35, 36) auf eine Endkappe (11, 12), auf eine innere Prallwand (13) oder auf eine Wand (18, 37) eines Strömungselements aufgebracht sind, das stromaufwärts vom ersten Monolith (5) angeordnet ist, der von den Abgasen durchflossen ist, wobei die genannte Schicht ein Material enthält, das eine katalytische Aktivität zum Zersetzen von Partikeln oder Tröpfchen von Harnstoff oder anderen stickstoffhaltigen Bestandteilen in Ammoniak in Gasphase aufweist, wobei  
15 die genannte innere Prallwand, die genannte Endkappe oder das genannte Strömungselement so angeordnet ist, daß die genannten Partikel und/oder Tröpfchen hierauf aufprallen.
17. Vorrichtung nach einem der vorangehenden Ansprüche, worin die genannten Endkappen, die genannte innere Prallwand und/oder das genannte Strömungselement so angeordnet ist bzw. sind, daß sich die Abgas-Strömungs-  
20 richtung um etwa 180 Grad nahe einem Bereich umkehrt, auf den die Partikel und/oder Tröpfchen aufprallen.
18. Vorrichtung nach einem der vorangehenden Ansprüche, worin die eine oder mehreren Schicht(en) (35, 36) porös ist bzw. sind und Oxide von Al, Si, V, Ti, Zr oder Fe oder Mischungen hiervon aufweist bzw. aufweisen.

25

**Patentansprüche für folgende Vertragsstaaten : FI, GR, IE, PT**

- 30 1. Vorrichtung zum Schalldämpfen und Reinigen von Abgasen, umfassend: ein luftdichtes Gehäuse (1); das mit einem Abgas-Einlaßrohr (2) und einem Abgas-Auslaßrohr (3) verbunden ist und folgendes enthält: wenigstens zwei akustische Abteile (4i, 4ii) sowie einen oder mehrere monolithische Körper (5), durch welche die Abgase in einer Strömungsrichtung in längsverlaufenden Kanälen oder Porositäten strömt, und ein oder mehrere Rohre oder Kanäle (6, 7), wobei mindestens ein Rohr oder Kanal (6) den einen oder mehrere der monolithischen Körper (5) penetriert und Abgase in einer Strömungsrichtung führt, die entgegengesetzt zu der Strömungsrichtung in den Kanälen oder Porositäten des monolithischen Körpers ist, wobei mindestens eines bzw. einer der Rohre oder  
35 Kanäle (6, 7) die mindestens zwei Abteile (4i, 4ii) verbindet, dadurch gekennzeichnet, daß das bzw. der wenigstens eine Rohr oder Kanal, das bzw. der die wenigstens zwei akustischen Abteile verbindet, sich über die, im wesentlichen gesamte Länge des monolithischen Körpers erstreckt, und daß das bzw. der wenigstens eine Rohr oder Kanal den monolithischen Körper penetriert oder sich längs dessen Außenoberfläche erstreckt.
- 40 2. Vorrichtung nach Anspruch 1, worin die allgemeine Strömungsrichtung im wesentlichen unmittelbar stromaufwärts eines penetrierten monolithischen Körpers (5) und im wesentlichen unmittelbar stromabwärts entweder desselben monolithischen Körpers oder eines anderen penetrierten monolithischen Körpers umgekehrt wird.
- 45 3. Vorrichtung nach Anspruch 1, worin ein penetrierendes Rohr oder Kanal (6) mittig im Querschnitt eines oder mehrerer monolithischer Körper (5) angeordnet ist.
4. Vorrichtung nach Anspruch 1, worin ein penetrierender Kanal (6) einen ringförmigen Querschnitt aufweist.
- 50 5. Vorrichtung nach Anspruch 3 und 4, worin das bzw. der mittig angeordnete Rohr oder Kanal (6ii) unmittelbar vom ringförmigen Kanal (6i) umgeben ist.
6. Vorrichtung nach Anspruch 1, worin ein monolithischer Körper (5) zylindrisch ist und von einem Kanal (7) mit ringförmigem Querschnitt umgeben ist.
- 55 7. Vorrichtung nach Anspruch 1, worin zwei oder mehrere Rohre oder Kanäle (7i, ii usw.) parallele Abgasströme stromabwärts einer Divergenz von einem gemeinsamen Rohr oder Hohlraum und stromaufwärts eines Zusammenflusses in ein anderes gemeinsames Rohr oder einen anderen gemeinsamen Hohlraum innerhalb des Ge-

häuses (1) leiten.

8. Vorrichtung nach Anspruch 1, worin ein oder mehrere der den Monolithen penetrierende Rohre oder Kanäle (6) mit dem Einlaßrohr (2) entweder unmittelbar oder über einen oder mehrere innere Rohre oder Kanäle (7) verbunden ist bzw. sind.
9. Vorrichtung nach Anspruch 1, worin ein oder mehrere der den Monolithen durchdringenden Rohre oder Kanäle (6) mit dem Auslaßrohr (3) entweder unmittelbar oder über einen oder mehrere innere Rohre oder Kanäle (7) verbunden ist bzw. sind.
10. Vorrichtung nach Anspruch 1, worin ein Hauptteil eines oder mehrerer der akustischen Abteile (4) von dem Raum innerhalb der Vielzahl von längsverlaufenden Kanälen oder Porositäten innerhalb eines monolithischen Körpers (5) gebildet ist.
11. Vorrichtung nach Anspruch 1, worin Rundungen (39), die die Strömungsauftrennung verhindern, zumindest zu einem Teil der Kontur des Auslaß- und/oder Einlaßrohres oder -kanales der Vorrichtung angefügt sind, wobei das bzw. der genannte Rohr oder Kanal das Einlaßrohr (2) oder seine Verlängerung in die Vorrichtung hinein und/oder das Auslaßrohr (3) oder seine Verlängerung in die Vorrichtung hinein und/oder ein Rohr oder Kanal (6, 7) ist, das die beiden Abteile (4i, 4ii) verbindet.
12. Vorrichtung nach Anspruch 11, worin die genannte Rundung (39) an einen Auslaß eines Rohres oder Kanales neben einem Auftreffbereich einer Gasströmung an einer Endkappe (11, 12), an einer inneren Prallwand (13) oder an einer Wand (18, 37) angefügt ist und hierdurch die sanfte Strömungsumkehr unterstützt.
13. Vorrichtung nach Anspruch 1, worin ein Diffusor (8, 9, 30) an das Auslaßende eines oder mehrerer der inneren Rohre oder Kanäle (6, 7) passend angesetzt ist.
14. Vorrichtung nach einem der vorangehenden Ansprüche, worin ein oder mehrere der monolithischen Körper mit einer katalytisch aktiven Oberfläche an den Kanälen versehen ist bzw. sind, und dieses katalytisch aktive Oberfläche bei der Zersetzung von Verunreinigungen in den Abgasen aktiv ist.
15. Vorrichtung nach einem der vorangehenden Ansprüche, worin Mittel vorgesehen sind, um Feststoffpartikel, die bei der katalytischen Reduktion von NO<sub>x</sub> aktiv sind, oder einen Sprühnebel einer Flüssigkeit, die Komponenten enthält, wie etwa eine wässrige Lösung von Harnstoff und/oder Ammoniak, die für die katalytische Reduktion von NO<sub>x</sub> aktiv sind, in die Abgase stromaufwärts der Vorrichtung in das Einlaßrohr (2) oder in ein Innenrohr oder einen Innenkanal (6, 7) stromaufwärts eines Monolithen (5) zu injizieren.
16. Vorrichtung nach einem der vorangehenden Ansprüche, worin eine oder mehrere Schichten (35, 36) auf eine Endkappe (11, 12), auf eine innere Prallwand (13) oder auf eine Wand (18, 37) eines Strömungselements aufgebracht sind, das stromaufwärts vom ersten Monolith (5) angeordnet ist, der von den Abgasen durchflossen ist, wobei die genannte Schicht ein Material enthält, das eine katalytische Aktivität zum Zersetzen von Partikeln oder Tröpfchen von Harnstoff oder anderen stickstoffhaltigen Bestandteilen in Ammoniak in Gasphase aufweist, wobei die genannte innere Prallwand, die genannte Endkappe oder das genannte Strömungselement so angeordnet ist, daß die genannten Partikel und/oder Tröpfchen hierauf aufprallen.
17. Vorrichtung nach einem der vorangehenden Ansprüche, worin die genannten Endkappen, die genannte innere Prallwand und/oder das genannte Strömungselement so angeordnet ist bzw. sind, daß sich die Abgas-Strömungsrichtung um etwa 180 Grad nahe einem Bereich umkehrt, auf den die Partikel und/oder Tröpfchen aufprallen.
18. Vorrichtung nach einem der vorangehenden Ansprüche, worin die eine oder mehreren Schicht(en) (35, 36) porös ist bzw. sind und Oxide von Al, Si, V, Ti, Zr oder Fe oder Mischungen hiervon aufweist bzw. aufweisen.

## Revendications

Revendications pour les Etats contractants suivants : AT, BE, CH, DE, DK, ES, FR, GB, IT, LI, NL, SE

5

1. Dispositif pour l'amortissement du bruit et l'épuration de gaz d'échappement comprenant : un boîtier (1) étanche à l'air, relié à un tube d'entrée d'échappement (2) et à un tube de sortie d'échappement (3) et contenant : au moins deux compartiments acoustiques (4i, 4ii), et un ou plusieurs corps monolithiques (5) à travers lesquels les gaz d'échappement s'écoulent dans une direction d'écoulement dans des canaux longitudinaux ou porosités longitudinales, et un ou plusieurs tubes ou canaux (6, 7), au moins un tube ou canal (5) traversant un ou plusieurs des corps monolithiques (5) et conduisant les gaz d'échappement dans une direction d'écoulement qui est l'inverse de la direction de l'écoulement dans les canaux ou porosités du corps monolithique, et au moins un des tubes ou canaux (6, 7) reliant les au moins deux compartiments (4i, 4ii), caractérisé en ce que ledit au moins un tube ou canal (6, 7) qui relie les au moins deux compartiments acoustiques (4i, 4ii) s'étend sensiblement sur toute la longueur dudit corps monolithique (5), et en ce que ledit au moins un tube ou canal (6, 7) traverse le corps monolithique (5) ou s'étend le long de sa surface extérieure, avec cette condition que le dispositif dans lequel :

10

♦ ledit au moins un tube ou canal (6, 7) relie deux compartiments acoustiques (4i, 4ii) et s'étend le long de la surface extérieure du corps monolithique (5), et dans lequel

20

♦ le dispositif comprend un et seulement un corps monolithique (5) qui est un catalyseur, avec une chicane adjacente, et qui est traversé par un tube relié audit tube d'entrée (2) ou audit tube de sortie (3), et dans lequel

25

♦ ladite chicane provoque une stagnation totale ou partielle de l'écoulement et amène les gaz d'échappement qui s'écoulent axialement en sortant d'un tube ou canal (6, 7) à s'écouler dans une direction radiale immédiatement en aval du tube ou canal et, de là, à travers les canaux longitudinaux ou porosités longitudinales du corps monolithique dans une direction d'écoulement qui est l'inverse de la direction de l'écoulement dans le tube ou canal, et dans lequel

30

♦ l'écoulement d'entrée dans le corps monolithique est réparti sur au moins deux ouvertures mutuellement décalées dans la direction radiale qui sont adaptées pour assurer une récupération de la pression dans l'écoulement de gaz qui les traverse, et dans lequel

35

♦ une matière absorbante acoustique est disposée dans deux cavités séparées dans le boîtier, chacune desdites cavités étant en communication acoustique avec le gaz qui s'écoule dans le boîtier, et chacune desdites cavités étant séparée d'un des compartiments acoustiques (4i, 4ii) par un tube ou une plaque perforée

sera exclu.

40

2. Dispositif selon la revendication 1, dans lequel la direction générale de l'écoulement est inversée sensiblement immédiatement en amont d'un corps monolithique (5) traversé et sensiblement immédiatement en aval, soit du même corps monolithique, soit d'un autre corps monolithique traversé.

45

3. Dispositif selon la revendication 1, dans lequel un tube ou canal traversant (6) est positionné au centre de la section transversale d'un ou plusieurs des corps monolithiques (5).

4. Dispositif selon la revendication 1, dans lequel un canal traversant (6) présente une section transversale annulaire.

50

5. Dispositif selon les revendications 3 et 4, dans lequel le tube ou canal (5ii) positionné au centre est directement entouré par le canal annulaire (6i).

6. Dispositif selon la revendication 1, dans lequel un corps monolithique (5) est cylindrique, et est entouré par un canal (7) de section annulaire.

55

7. Dispositif selon la revendication 1, dans lequel deux ou plus de deux tubes ou canaux (7i, ii etc.) conduisent des courants d'échappement parallèles en aval d'une divergence partant d'un tube commun ou d'une cavité commune et en amont d'un confluent débouchant dans un autre tube commun ou une autre cavité commune à l'intérieur du



boîtier (1).

8. Dispositif selon la revendication 1, dans lequel un ou plusieurs des tubes ou canaux (6) traversant les monolithes communiquent avec le tube d'entrée (2), soit directement, soit par l'intermédiaire d'un ou de plusieurs autres tubes ou canaux intérieurs (7).
9. Dispositif selon la revendication 1, dans lequel un ou plusieurs des tubes ou canaux (6) qui traversent les monolithes communiquent avec le tube de sortie (3), soit directement, soit par l'intermédiaire d'un ou de plusieurs autres tubes ou canaux intérieurs (7).
10. Dispositif selon la revendication 1, dans lequel la majeure partie d'un ou plusieurs des compartiments acoustiques (4) est constituée par l'espace contenu dans la multitude de canaux longitudinaux ou de porosités longitudinales situés à l'intérieur d'un corps monolithique (5).
11. Dispositif selon la revendication 1, dans lequel des courbures (39) qui évitent le décollement de l'écoulement sont appliquées à au moins une partie du profil de la sortie et/ou de l'entrée d'un tube ou canal du dispositif, ledit tube ou canal étant le tube d'entrée (2) ou son prolongement qui débouche dans le dispositif, et/ou le tube de sortie (3) ou son prolongement qui débouche dans le dispositif et/ou un tube ou canal (6, 7) qui relie deux compartiments (4i, 4ii).
12. Dispositif selon la revendication 11, dans lequel ladite courbure (39) est appliquée à une sortie d'un tube ou canal à proximité d'une région de collision de l'écoulement du gaz sur un chapeau d'extrémité (11, 12), sur une chicane intérieure (13) ou sur une paroi (18, 37), en assistant ainsi l'obtention d'une inversion sans heurt de l'écoulement.
13. Dispositif selon la revendication 1, dans lequel un diffuseur (8, 9, 30) est monté sur l'extrémité de sortie d'un ou plusieurs des tubes ou canaux intérieurs (6, 7).
14. Dispositif selon l'une quelconque des revendications précédentes, dans lequel un ou plusieurs des corps monolithiques est ou sont muni(s) d'une surface catalytique active sur les canaux, laquelle surface catalytique active est active pour la décomposition des impuretés contenues dans les gaz d'échappement.
15. Dispositif selon l'une quelconque des revendications précédentes, dans lequel il est prévu des moyens pour injecter des particules solides actives pour la réduction catalytique de NOx, ou une pulvérisation d'un liquide contenant des constituants, tel qu'une solution aqueuse d'urée et/ou d'ammoniaque, active pour la réduction catalytique de NOx, dans les gaz d'échappement en amont du dispositif, dans le tube d'entrée (2) ou dans un tube ou canal intérieur (6, 7) en amont d'un monolithe (5).
16. Dispositif selon l'une quelconque des revendications précédentes, dans lequel une ou plusieurs couches (35, 36) sont appliquées sur un chapeau d'extrémité (11, 12), sur une chicane intérieure (13) ou sur une paroi (18, 37) d'un élément d'écoulement qui est de préférence positionné en amont du premier monolithe (5) traversé par les gaz d'échappement, ladite couche contenant une matière qui a une activité catalytique pour la décomposition en une phase gazeuse d'ammoniac de particules ou gouttelettes d'urée ou d'autres constituants contenant de l'azote, ladite chicane intérieure, ledit chapeau d'extrémité ou ledit élément d'écoulement étant arrangé de telle manière que lesdites particules et/ou gouttelettes les frappent.
17. Dispositif selon l'une quelconque des revendications précédentes, dans lequel lesdits chapeaux d'extrémité, ladite chicane intérieure et/ou ledit élément d'écoulement est ou sont arrangés de manière que la direction d'écoulement des gaz d'échappement s'inverse d'environ 180 degrés à proximité d'une région dans laquelle les particules et/ou gouttelettes les frappent.
18. Dispositif selon l'une quelconque des revendications précédentes, dans lequel la une ou les plusieurs couches (35, 36) est ou sont poreuses et comprend ou comprennent des oxydes de Al, Si, V, Ti, Zr ou Fe, ou des mélanges de ces oxydes.

Revendications pour les Etats contractants suivants : FI, GR, IE, PT

1. Dispositif pour l'amortissement du bruit et l'épuration de gaz d'échappement comprenant : un boîtier (1) étanche

- à l'air, relié à un tube d'entrée d'échappement (2) et à un tube de sortie d'échappement (3) et contenant au moins deux compartiments acoustiques (4i, 4ii), et un ou plusieurs corps monolithiques (5) à travers lesquels les gaz d'échappement s'écoulent dans une direction d'écoulement dans des canaux longitudinaux ou porosités longitudinales, et un ou plusieurs tubes ou canaux (6, 7), au moins un tube ou canal (6) traversant un ou plusieurs des corps monolithiques (5) et conduisant les gaz d'échappement dans une direction d'écoulement qui est l'inverse de la direction de l'écoulement dans les canaux ou porosités du corps monolithique, et au moins un des tubes ou canaux (6, 7) reliant les au moins deux compartiments (4i, 4ii), caractérisé en ce que ledit au moins un tube ou canal qui relie les au moins deux compartiments acoustiques s'étend sensiblement sur toute la longueur dudit corps monolithique, et en ce que ledit au moins un tube ou canal traverse le corps monolithique ou s'étend le long de sa surface extérieure.
2. Dispositif selon la revendication 1, dans lequel la direction générale de l'écoulement est inversée sensiblement immédiatement en amont d'un corps monolithique (5) traversé et sensiblement immédiatement en aval, soit du même corps monolithique, soit d'un autre corps monolithique traversé.
  3. Dispositif selon la revendication 1, dans lequel un tube ou canal traversant (6) est positionné au centre de la section transversale d'un ou plusieurs des corps monolithiques (5).
  4. Dispositif selon la revendication 1, dans lequel un canal traversant (6) présente une section transversale annulaire.
  5. Dispositif selon les revendications 3 et 4, dans lequel le tube ou canal (6ii) positionné au centre est directement entouré par le canal annulaire (6i).
  6. Dispositif selon la revendication 1, dans lequel un corps monolithique (5) est cylindrique, et est entouré par un canal (7) de section annulaire.
  7. Dispositif selon la revendication 1, dans lequel deux ou plus de deux tubes ou canaux (7i, ii etc.) conduisent des courants d'échappement parallèles en aval d'une divergence partant d'un tube commun ou d'une cavité commune et en amont d'un confluent débouchant dans un autre tube commun ou une autre cavité commune à l'intérieur du boîtier (1).
  8. Dispositif selon la revendication 1, dans lequel un ou plusieurs des tubes ou canaux (6) traversant les monolithes communiquent avec le tube d'entrée (2), soit directement, soit par l'intermédiaire d'un ou de plusieurs autres tubes ou canaux intérieurs (7).
  9. Dispositif selon la revendication 1, dans lequel un ou plusieurs des tubes ou canaux (6) qui traversent les monolithes communiquent avec le tube de sortie (3), soit directement, soit par l'intermédiaire d'un ou de plusieurs autres tubes ou canaux intérieurs (7).
  10. Dispositif selon la revendication 1, dans lequel la majeure partie d'un ou plusieurs des compartiments acoustiques (4) est constituée par l'espace contenu dans la multitude de canaux longitudinaux ou de porosités longitudinales situés à l'intérieur d'un corps monolithique (5).
  11. Dispositif selon la revendication 1, dans lequel des courbures (39) qui évitent le décollement de l'écoulement sont appliquées à au moins une partie du profil de la sortie et/ou de l'entrée d'un tube ou canal du dispositif, ledit tube ou canal étant le tube d'entrée (2) ou son prolongement qui débouche dans le dispositif et/ou le tube de sortie (3) ou son prolongement qui débouche dans le dispositif et/ou un tube ou canal (6, 7) qui relie deux compartiments (4i, 4ii).
  12. Dispositif selon la revendication 11, dans lequel ladite courbure (39) est appliquée à une sortie d'un tube ou canal à proximité d'une région de collision de l'écoulement du gaz sur un chapeau d'extrémité (11, 12), sur une chicane intérieure (13) ou sur une paroi (18, 37), en assistant ainsi l'obtention d'une inversion sans heurt de l'écoulement.
  13. Dispositif selon la revendication 1, dans lequel un diffuseur (8, 9, 30) est monté sur l'extrémité de sortie d'un ou plusieurs des tubes ou canaux intérieurs (6, 7).
  14. Dispositif selon l'une quelconque des revendications précédentes, dans lequel un ou plusieurs des corps monolithiques est ou sont muni(s) d'une surface catalytique active sur les canaux, laquelle surface catalytique active

est active pour la décomposition des impuretés contenues dans les gaz d'échappement.

- 5 15. Dispositif selon l'une quelconque des revendications précédentes, dans lequel il est prévu des moyens pour injecter des particules solides actives pour la réduction catalytique de NOx, ou une pulvérisation d'un liquide contenant des constituants, tel qu'une solution aqueuse d'urée et/ou d'ammoniaque, active pour la réduction catalytique de NOx, dans les gaz d'échappement en amont du dispositif, dans le tube d'entrée (2) ou dans un tube ou canal intérieur (6, 7) en amont d'un monolithe (5).
- 10 16. Dispositif selon l'une quelconque des revendications précédentes, dans lequel une ou plusieurs couches (35, 36) sont appliquées sur un chapeau d'extrémité (11, 12), sur une chicane intérieure (13) ou sur une paroi (18, 37) d'un élément d'écoulement qui est de préférence positionné en amont du premier monolithe (5) traversé par les gaz d'échappement, ladite couche contenant une matière qui a une activité catalytique pour la décomposition en une phase gazeuse d'ammoniac de particules ou gouttelettes d'urée ou d'autres constituants contenant de l'azote, ladite chicane intérieure, ledit chapeau d'extrémité ou ledit élément d'écoulement étant arrangé de telle manière que lesdites particules et/ou gouttelettes les frappent.
- 15 17. Dispositif selon l'une quelconque des revendications précédentes, dans lequel lesdits chapeaux d'extrémité, ladite chicane intérieure et/ou ledit élément d'écoulement est ou sont arrangés de manière que la direction d'écoulement des gaz d'échappement s'inverse d'environ 180 degrés à proximité d'une région dans laquelle les particules et/ou gouttelettes les frappent.
- 20 18. Dispositif selon l'une quelconque des revendications précédentes, dans lequel la une ou les plusieurs couches (35, 36) est ou sont poreuses et comprend ou comprennent des oxydes de Al, Si, V, Ti, Zr ou Fe, ou des mélanges de ces oxydes.
- 25

30


35

40

45

50

55

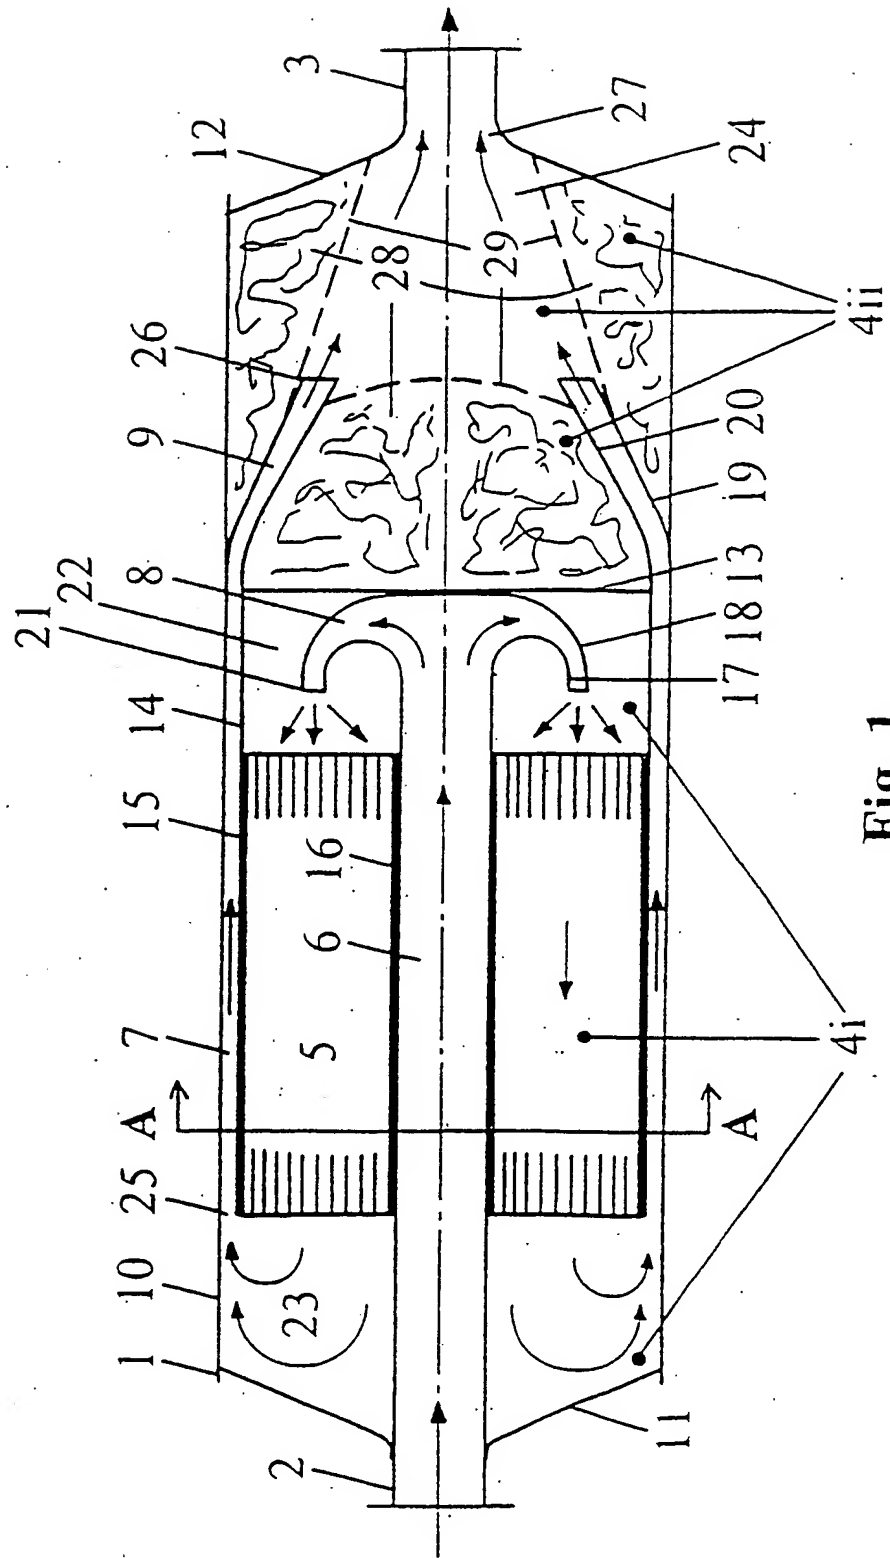

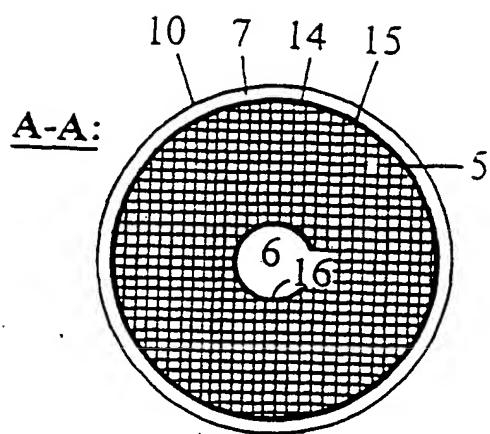


Fig. 2

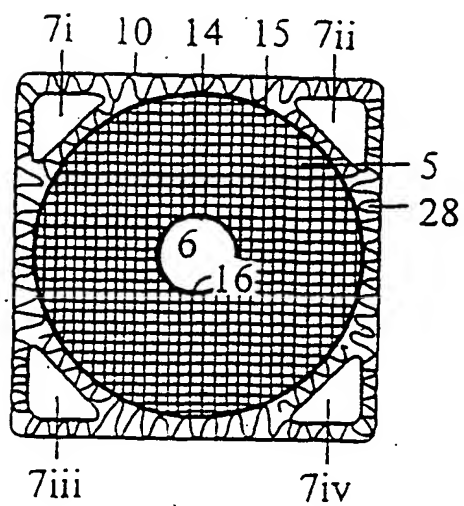


Fig. 3

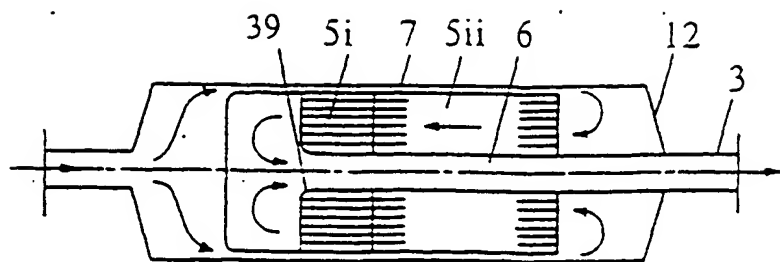


Fig. 4

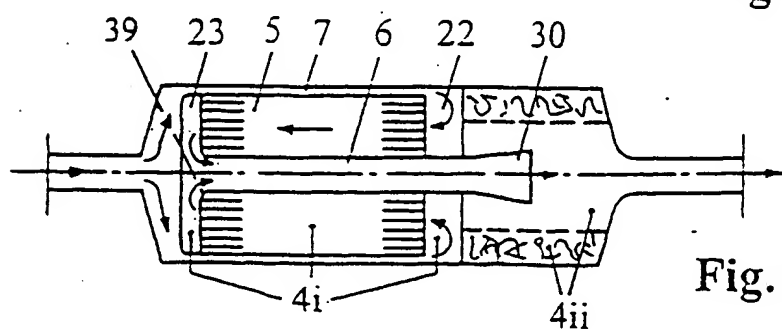


Fig. 5

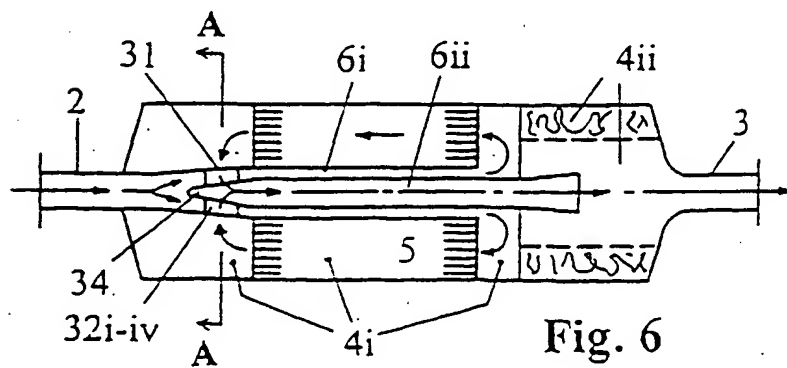


Fig. 6

A-A:




Fig. 7

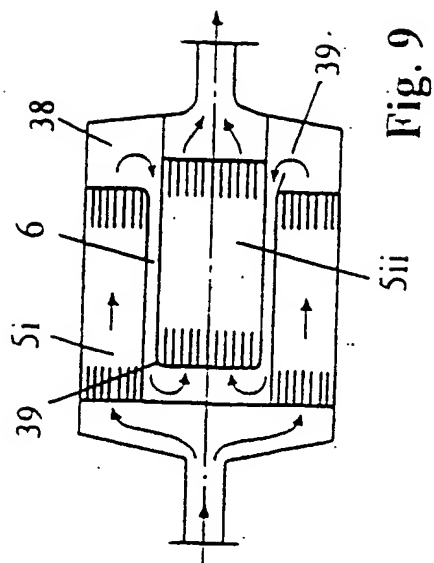


Fig. 9

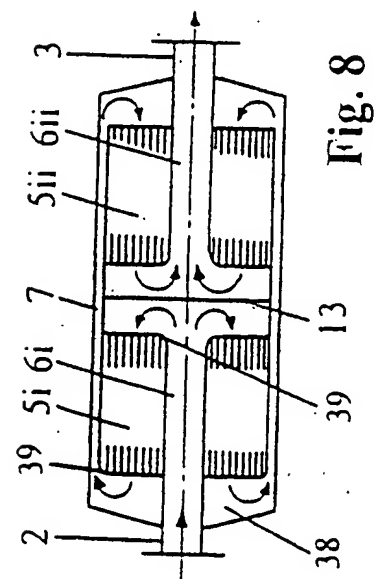


Fig. 8

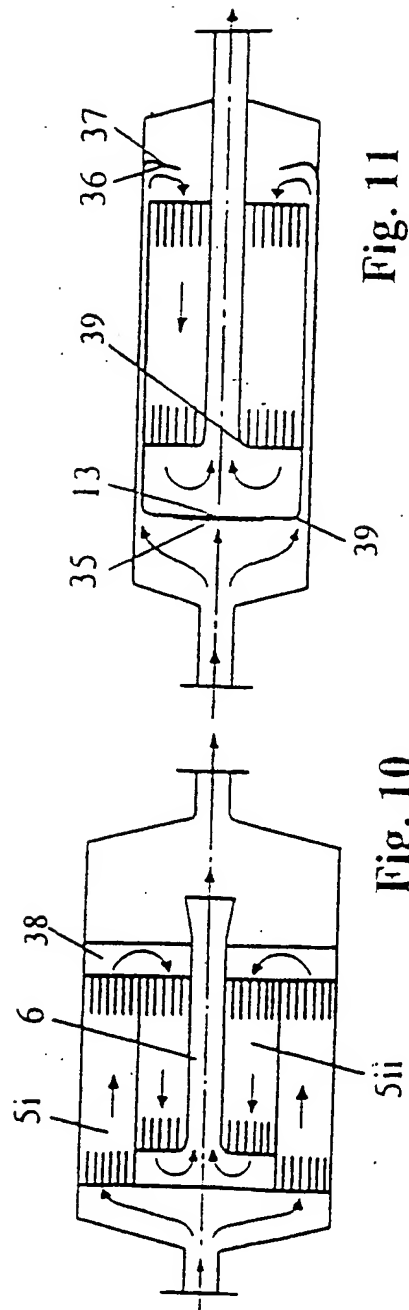


Fig. 10

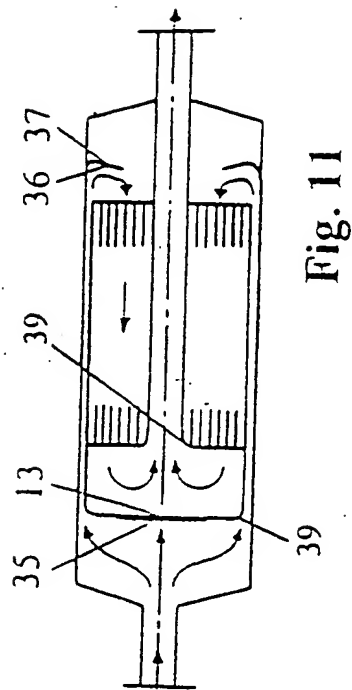


Fig. 11